


StreamPix 5 & TroublePix

CMOSIS Sensor support

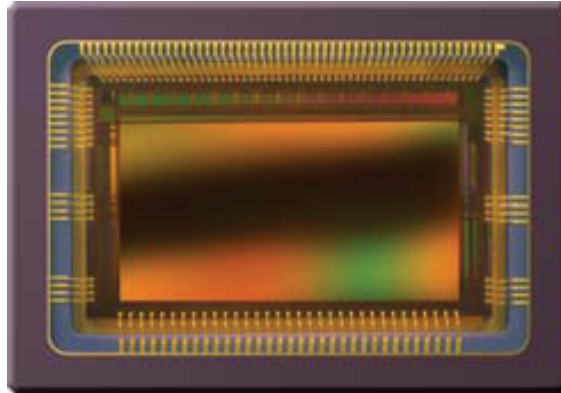

Basler acA2000-340, acA2040-180

Baumer HXC20, HXC40

PT GREY Gazelle CL-22, CL-41

Ximea USB3 MQ-022 and MQ-042

AVT GT2000

Vieworks VC-4MC-x340, VC-2MC-x180

Features:

- Acquire from 180 to 340 fps at resolution up to 2048 x 2048 x 8 bits.
- Acquire directly to RAM or disk for long recording time.
- Acquire with no frame drop.
- Portable or desktop solutions.
- Supported camera link frame grabbers:
 - Bitflow
 - Teledyne Dalsa
 - Matrox
 - Silicon Software

